

## B Series


# TRIAC Dimming LED Driver

可控硅调光LED驱动器

## Features:

- Dimmable with ordinary TRIAC dimmer (leading edge or trailing edge dimmer)
- Constant current driver
- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Dimming range 1...100%

- 适用普通可控硅调光器(前切相和后切相)
- 恒流驱动
- 超小体积，独立式紧凑型设计
- 简便自锁式压线盖
- 螺丝锁紧大接线端子，方便多规格线接驳
- 安全无负载保护装置
- 输出开路，短路，过载和超温保护
- 符合安全特低电压标准
- 保护等级 II
- 调光范围 1...100%光通量

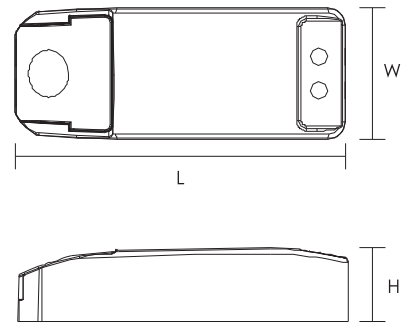

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
DIM350mA/9W	220-240	9	350	6-26	0.90C	79	-20...+50	90	SELV	113x44x28	108
DIM350mA/18W	220-240	18	350	15-52	0.90C	81	-20...+50	90	SELV	113x44x28	108
DIM450mA/18W	220-240	18	450	12-40	0.90C	80	-20...+50	90	SELV	113x44x28	108
DIM500mA/18W	220-240	18	500	9-36	0.90C	80	-20...+50	90	SELV	113x44x28	108
DIM600mA/18W	220-240	18	600	12-30	0.90C	79	-20...+50	90	SELV	113x44x28	108
DIM700mA/18W	220-240	18	700	6-26	0.90C	79	-20...+50	90	SELV	113x44x28	108
DIM1050mA/18W	220-240	18	1050	3-18	0.90C	79	-20...+50	90	SELV	113x44x28	108
DIM350mA/20W	220-240	20	350	18-58	0.90C	82	-20...+50	90	SELV	113x44x28	108