

LT Series


Constant Voltage LED Driver

LED恒压驱动器

Features:

- Super slim design
- Captured terminal screws
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 超细长紧凑设计
- 输入输出螺丝锁紧接线端子
- 输出开路, 短路, 过载和超温保护
- 符合安全特低电压标准
- 保护等级 II

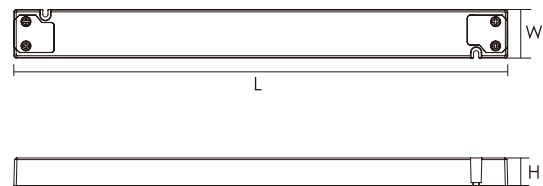

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output voltage 输出电压 (V)	Output current 输出电流 (A)	Power factor 功率因数 (λ)	Efficiency 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
LT-30-12	220-240	30	12	0-2.5	0.95	83	<0.5	-20...+50	90	SELV	251x30x16	124
LT-30-24	220-240	30	24	0-1.25	0.95	84	<0.5	-20...+50	90	SELV	251x30x16	124
LT-45-12	220-240	45	12	0-3.75	0.95	85	<0.5	-20...+50	90	SELV	251x30x16	124
LT-45-24	220-240	45	24	0-1.87	0.95	86	<0.5	-20...+50	90	SELV	251x30x16	124
LT-60-12	220-240	60	12	0-5.0	0.95	90	<0.5	-20...+50	75	SELV	305x30x17	152
LT-60-24	220-240	60	24	0-2.5	0.95	91	<0.5	-20...+50	75	SELV	305x30x17	152
LT-75-12	220-240	75	12	0-6.25	0.95	90	<0.5	-20...+50	90	SELV	305x30x17	152
LT-75-24	220-240	75	24	0-3.125	0.95	91	<0.5	-20...+50	90	SELV	305x30x17	152
LT-100-12	220-240	100	12	0-8.34	0.95	91	<0.5	-20...+45	90	SELV	312x30x18.2	152
LT-100-24	220-240	100	24	0-4.17	0.95	92	<0.5	-20...+45	90	SELV	312x30x18.2	152
LT-150-12	220-240	132	12	0-11	0.95	92	<0.5	-20...+45	90	SELV	335x30x21.6	235
LT-150-24	220-240	150	24	0-6.25	0.95	93	<0.5	-20...+45	80	SELV	335x30x21.6	235